

HOW TO INSTALL THE NEW PARTS WITH YOUR POOL

Please scan the QR code or follow the instructions and illustrations below.
Illustrations are for reference only and may not represent the actual product.
Not to scale.




⚠ WARNING

Drowning hazard. The pool uses compression straps that a child may use as a foothold to access the pool. This retrofit is critical to prevent child access and drowning.

- **Immediately install the repair**, which will maintain the structural integrity of the pool without use of the strap.


CONTENTS OF REPAIR KIT

- 1 Rope and pulley
- C-shaped holders (the appearance and number of C-shaped holders will vary based on your item)
- 1 Cutting tool

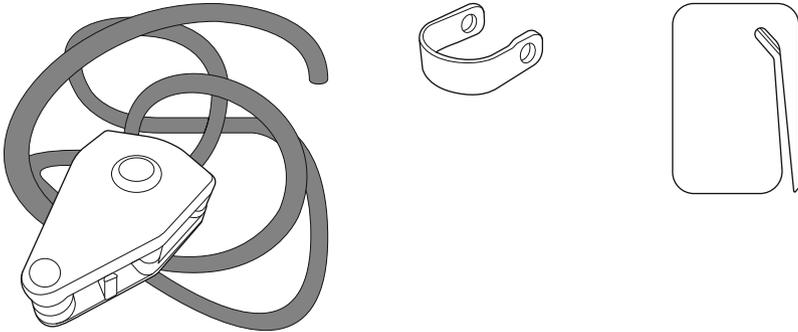

PREPARATION

Fill the pool to approximately 90% capacity and familiarize yourself with the new parts. You will need a pair of scissors (not included).

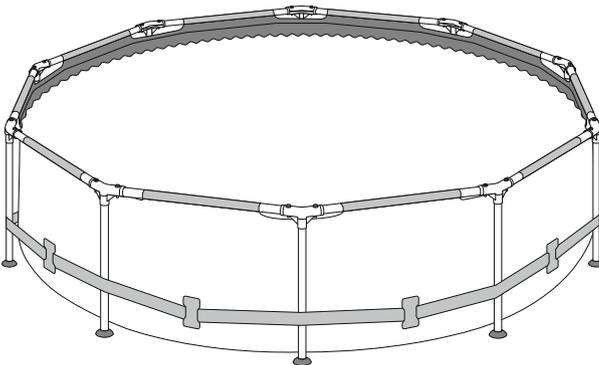



HOW TO INSTALL THE NEW PARTS WITH YOUR POOL

Please scan the QR code or follow the instructions and illustrations below.
Illustrations are for reference only and may not represent the actual product.
Not to scale.





STEP 1 Install the New Rope System

1.1 Attach C-shaped holders to the vertical legs, with the openings facing the pool liner, as shown.

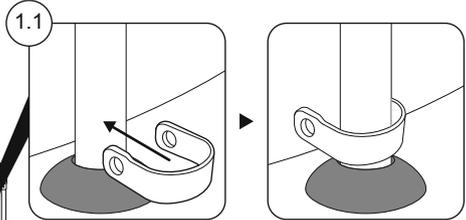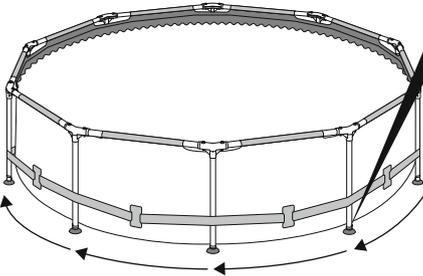

1.2 Thread rope through C-shaped holders around the bottom, between the liner and legs.

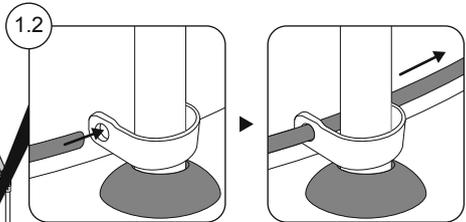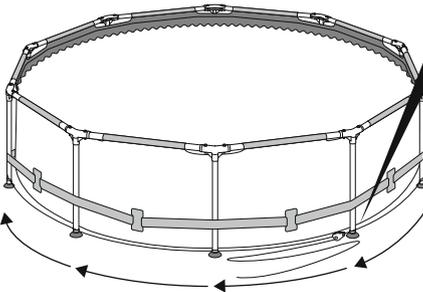


HOW TO INSTALL THE NEW PARTS WITH YOUR POOL

Please scan the QR code or follow the instructions and illustrations below.
Illustrations are for reference only and may not represent the actual product.
Not to scale.






STEP 2 Tighten and Secure



2.1 Thread the rope through the tightener's smaller end and tie a knot to secure it.

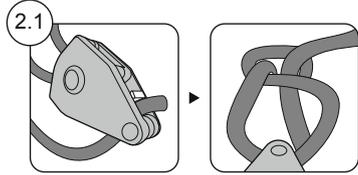

2.2 Pull the rope outward to tighten. Check and ensure all holders maintain their shape.

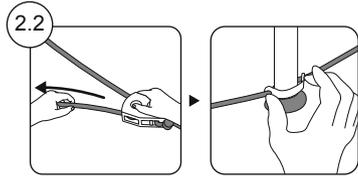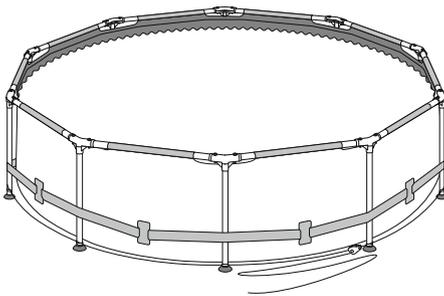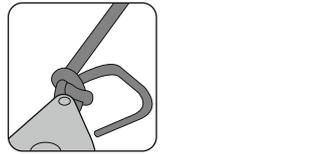

2.3 Cut off excess rope to prevent young children from entangling themselves or tripping.

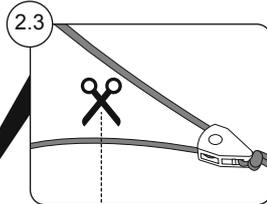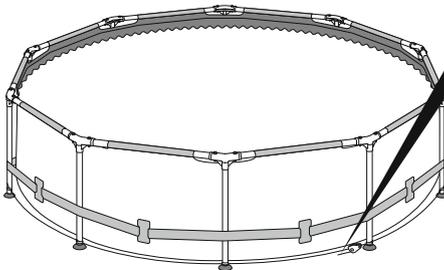

HOW TO INSTALL THE NEW PARTS WITH YOUR POOL



Please scan the QR code or follow the instructions and illustrations below.
Illustrations are for reference only and may not represent the actual product.
Not to scale.



STEP 3 Remove the Original Belt


3. Use the provided cutting tool to carefully cut the original strap/belt that goes around the lower part of the pool liner and legs into small pieces for easier disposal. Remove the strap after cutting.

- ! **IMPORTANT:** Be gentle to avoid damaging the pool liner.

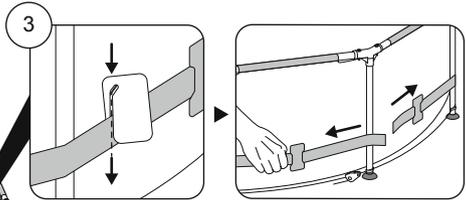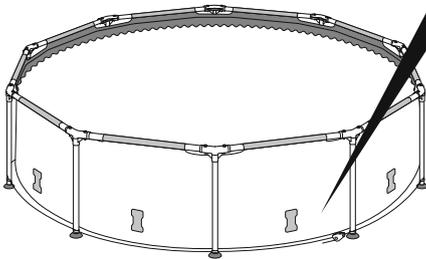

To Loosen the Rope

Press the release latch on the smaller end of the tightener while gently pulling the rope.

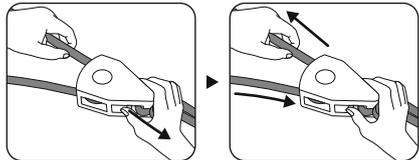

Bestway®